


Item # _____

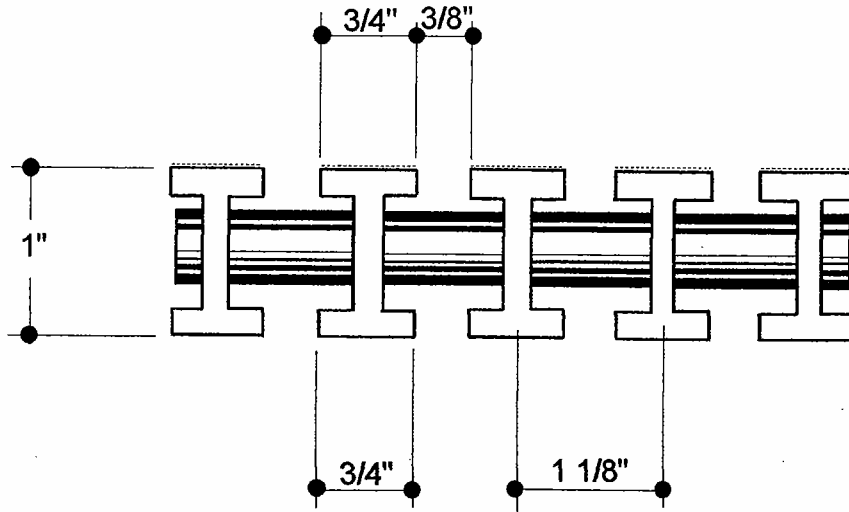

Profile

Technical Data:

| | |
|---------------------------|----------------|
| Width of I-bar top | 3/4" wide |
| Gap between bars | 3/8" |
| Open area/sq. ft. | 24% |
| Grating height | 1" |
| Grating upright thickness | 5/16" |
| Grating web thickness | 7/32" |
| Deflection 300 lbs @ 18" | 3/16" |
| Maximum support span | 24" o.c. |
| Surface texture | Slip-resistant |
| Warranty | 10 Years |

Standard crossrods at 12" on center.
Other spacing available on request.

Design & Product Information:

DuraTech PVC grating is formulated with maximum U.V. inhibitors added to 100% virgin exterior grade impact resistant PVC resin. Integral slip-resistance is embossed into the grating top surface as a standard safety feature. Custom configurations, radius bends and various designs are available. Available in white only.

Installation:

Grating to be supported and anchored at a maximum 24" on center and to be supported at all grating section ends. Where two sections butt together provide double grating supports.

DuraTech™ I-bar

PVC Pool Grating U.V.

"White"

RenoSys®
corporation

2825 East 55th Place
Indianapolis, IN 46220
Phone: 317-251-0207
Fax: 317-251-0360

Project:

Date:

Drawn:

Draw. No.

Scale: None